

**Aohua Endoscopy Co.,Ltd.**

**E-mail :** [vets@aohua.com](mailto:vets@aohua.com)  
**Website:** [www.aohua.com/vet.en](http://www.aohua.com/vet.en)

**China**  
No.66, Lane133, Guangzhong Road,  
Minhang District, Shanghai  
Tel : 86-21-6768 1018

**Germany**  
Fichtenstrasse 27,  
Brunnthal, Munich  
Tel :+49 (0) 81 04/8908-10

**USA**  
20 N Front St  
Bally, PA 19503  
Tel : 888-238-5214

**AOHUA**  
  
ISO 9001/ISO 13485 Certified  
V1.0\_2209

**AOHUA**



# VET-OR1200RH

## Veterinary Endoscopy System

# VET-OR1200RH

Veterinary Endoscopy System



Provide solutions for both  
Gastrointestinal Endoscopy and Laparoscopy

# VET-OR1200RH Veterinary Endoscopy System


VET-OR1200RH is based on the latest digital technology.

With camera head available, you can connect both flexible and rigid endoscopes to processor.




## Excellent Image Quality

Image sensor delivers brighter images and better color. Clear and sharp images reveal more clinical details.

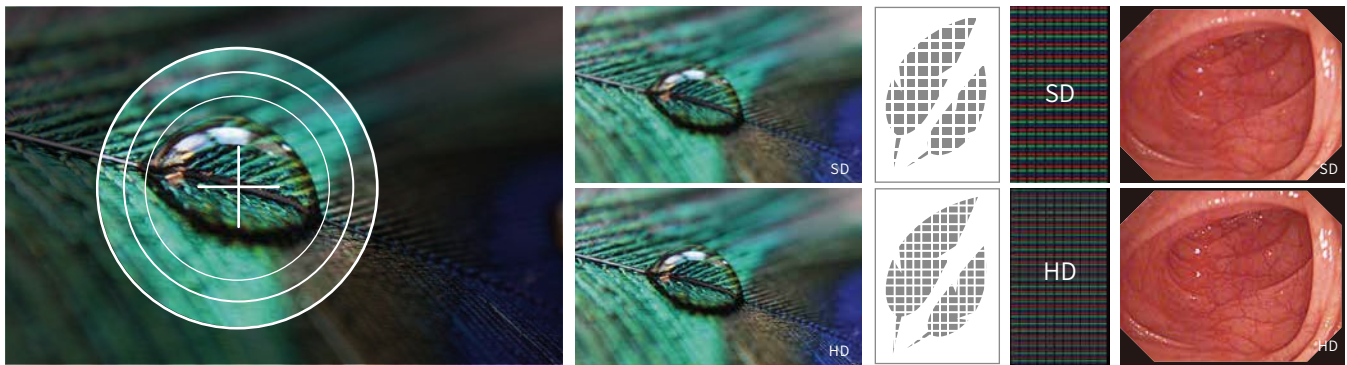

## Hemoglobin Enhancement (HbE)

The powerful upgraded HbE function can better highlight the hemoglobin in the blood to reveal vascular changes more clearly in diseased tissue.

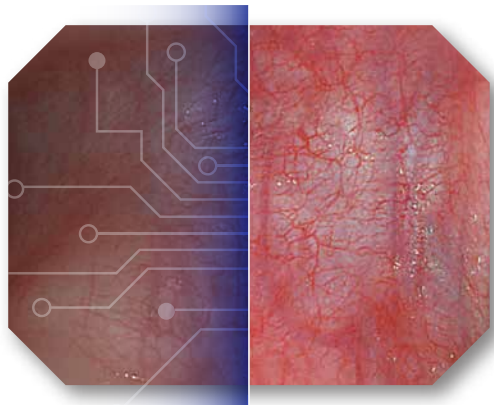

# VET-OR1200RH

Veterinary Endoscopy System



## PRODUCT INFORMATION


### ARTHROSCOPY

#### SET A



| ARTICLE NO     | PRODUCT NAME     | DESCRIPTION                                                                  |
|----------------|------------------|------------------------------------------------------------------------------|
| AH-0190.00.120 | Rigid Endoscope  | Ø1.9mm x 120mm, 0 deg., Autoclavable.                                        |
| AH-0190.30.120 | Rigid Endoscope  | Ø1.9mm x 120mm, 30 deg., Autoclavable.                                       |
| AH-0630.19.120 | Endoscope Sheath | with two stop cock rotatable, for scope Ø1.9mm & 2.0mm, working length 120mm |

#### SET B

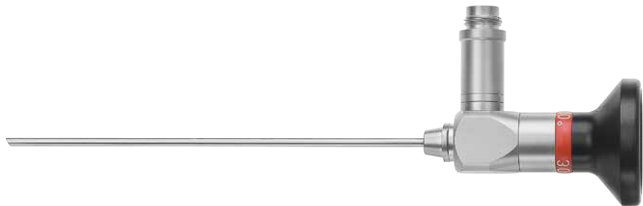

| ARTICLE NO     | PRODUCT NAME              | DESCRIPTION                                                                  |
|----------------|---------------------------|------------------------------------------------------------------------------|
| AH-0240.00.110 | Rigid Endoscope           | Ø2.4mm x 110mm, 0 deg., Autoclavable.                                        |
| AH-0240.30.110 | Rigid Endoscope           | Ø2.4mm x 110mm, 30 deg., Autoclavable.                                       |
| AH-0630.24.110 | Endoscopy Sheath          | with two stop cock rotatable, for Scopes with Ø 2,4 mm working Length 110 mm |
| AH-0674.24.110 | Obturator / Conical blunt | for Scope Ø 2,4 mm / 110 mm                                                  |



SET C



| ARTICLE NO     | PRODUCT NAME                        | DESCRIPTION                                                                                                                                      |
|----------------|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| AH-0270.00.175 | Rigid Endoscope                     | Ø2.7mm x 175mm, 0 deg., Autoclavable.                                                                                                            |
| AH-0270.30.175 | Rigid Endoscope<br>Operation Sheath | Ø2.7mm x 175mm, 30 deg., Autoclavable.<br>with two stop cock rotatable, for Scopes with Ø 2,7 mm working<br>Lengthh 175 mm and Operation Channel |

SET D



| ARTICLE NO      | PRODUCT NAME                | DESCRIPTION                                                                      |
|-----------------|-----------------------------|----------------------------------------------------------------------------------|
| AH-0630.27.175  | Diagnostic Sheath           | with two stop cock rotatable,<br>for Scopes with Ø 2,7 mm working Lengthh 175 mm |
| AH-0672.27.175  | Obturator-blunt             | for Diagnostic Sheath, blunt / for Scope Ø 2,7 mm / 175 mm                       |
| AH-0673.27.175  | Obturator                   | for Diagnostic Sheath, sharp / for Scope Ø 2,7 mm / 175 mm                       |
| AH-RS200-16-040 | Semi-Rigid Forceps          | 5Fr. x 40cm                                                                      |
| AH-RS204-16-040 | Semi-Rigid Aligator Grasper | 5Fr. x 40cm                                                                      |




OTHER RIGID ENDOSCOPE



| ARTICLE NO         | PRODUCT NAME             | DESCRIPTION                                 |
|--------------------|--------------------------|---------------------------------------------|
| AH-0500.00.302     | Rigid Endoscope          | Laparoscope Ø 5,0mm 0° 302 mm               |
| AH-0500.30.302     | Rigid Endoscope          | Laparoscope Ø 5,0 mm 30° 302 mm             |
| AH-1000.00.324     | Rigid Endoscope          | Laparoscope Ø 10,0mm 0° 324 mm              |
| AH-1000.30.324     | Rigid Endoscope          | Laparoscope Ø 10,0mm 30° 324 mm             |
| AH-1000.00.324HD-C | Ultra-HD Rigid Endoscope | Laparoscope Ø 10,0 mm 0° 324 mm HD-C (UHD ) |
| AH-1000.30.324HD-C | Ultra-HD Rigid Endoscope | Laparoscope Ø 10,0 mm 30° 324 mm HD-C (UHD) |



| ARTICLE NO     | PRODUCT NAME            | DESCRIPTION                                                   |
|----------------|-------------------------|---------------------------------------------------------------|
| AH-1400.70.400 | Equine Dental Endoscope | 14mm diameter x 400mm working<br>tube length x 70 degree view |

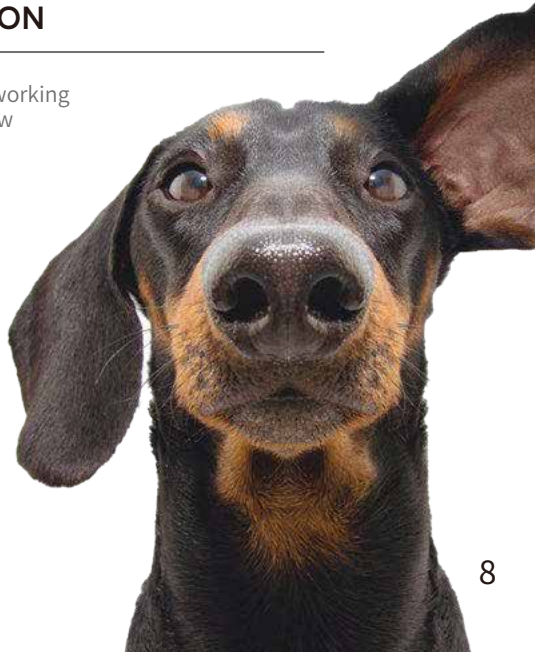

# AOHUA Tetraflator 45



## High-Performance CO<sub>2</sub>-Insufflator with integrated gas-heating and smoke-evacuation (optional)

- 01- 45 Liter flow-rate
- 02- integrated gas-heating
- 03- optimal pressure control
- 04- CO<sub>2</sub> supply with gas-bottle or central
- 05- optical/acoustic warnings at excess pressure
- 06- pressure relief valve



## Specifications

|                                   |                                           |
|-----------------------------------|-------------------------------------------|
| Max. gas flow                     | 45l/min                                   |
| Pressure range                    | 3-30mmHg                                  |
| Gas connection                    | CO <sub>2</sub> -US-Standard              |
| Mains voltage                     | 100-240V/50/60Hz                          |
| Power input                       |                                           |
| Tetraflator Standard              | 100VA,                                    |
| Tetraflator with smoke evacuation | 140VA                                     |
| Casing                            | Stainless steel, aluminium / white coated |
| Dimensions                        | w x h x d = 350 x 130 x 360 mm            |
| Weight                            | app. 8kg                                  |

### 7085L45

CO<sub>2</sub>-infufflator 45L each with one single-use heating hose, Gas Filter (to bottle-/house-connection), Gas-Filter (to patient), Filter adaptor for multi-use heating hose.

### 7085L45SE

CO<sub>2</sub>-infufflator 45L each with smoke evacuation each with one Single-use heating hose, Gas Filter (to bottle-/house-connection), Gas-Filter (to patient), Filter adaptor for multi-useheating hose, tubing-set for smoke-evakuation, foot-switch for smoke evakuation.

